

E4P OEM Miniature Optical Kit Encoder

Page 1 of 1



Description

**On January 16, 2012, the E4P part number will be modified.
Please see the E4P Part Number Change notification for more information.**

The E4P miniature encoder is designed to provide digital quadrature encoder feedback for high volume applications with limited space constraints. The E4P version utilizes an innovative, patented push-on codewheel which accepts shaft diameters of 1.5mm to .250".

The E4P encoder is the leader for high quantity OEM applications, but the E4 is the ideal choice when a set-screw codewheel encoder is required (see the E4 page).

The E4P miniature encoder base provides mounting holes for two #3-48, length 1/4" or two M2.5x.45mm, length 6mm screws on a .586" bolt circle. When mounting holes are not available, a pre-applied transfer adhesive (with peel-off backing) is available for "stick-on" mounting.

The encoder cover is easily snapped onto the base and is embossed with the connector pin-out.

The E4P series encoder can be connected by using a (high retention 4-conductor snap-in polarized 1.25mm pitch) connector. Mating cables and connectors (see the Cables / Connectors web page) are not included, and are available separately.



Features

- ▶ Miniature size
- ▶ Push-on hub - spring loaded collet design
- ▶ Minimum shaft length of .375"
- ▶ Fits shaft diameters of .059" to .250"
- ▶ Accepts +/- .020" Axial shaft play
- ▶ Off-axis mounting tolerance of .010"
- ▶ 100 to 360 cycles per revolution (CPR)
- ▶ 400 to 1440 pulses per revolution (PPR)
- ▶ Single +5V supply

Rev. 120326065423




E4P OEM Miniature Optical Kit Encoder

Page 2 of 3




E4P Differential

E4P Differential OEM Miniature Optical Kit Encoder

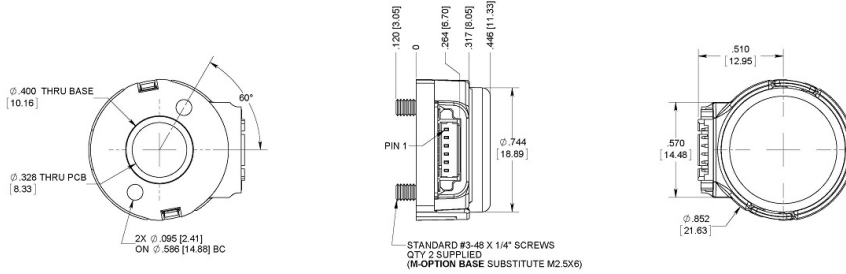


RELEASE DATE: 8/21/2011

H-OPTION COVER (COVER HOLE FOR EXTEND SHAFT LENGTHS)



H₁: 170° [4.32] FOR BORE SIZES 1.5MM TO 1/8"
H₂: 295° [7.49] FOR BORE SIZES 5/32" TO 1/4"

T-OPTION BASE (ADHESIVE MOUNTING)



US DIGITAL 1400 NE 150th Avenue
Vancouver, Washington 98684, USA


info@usdigital.com
www.usdigital.com

Local: 360.290.2468
Toll-free: 800.736.0194

UNITS: INCHES (MM)
MULTIPLE DIMENSIONS FOR REFERENCE ONLY


E4P Single Ended

E4P Single-Ended OEM Miniature Optical Kit Encoder

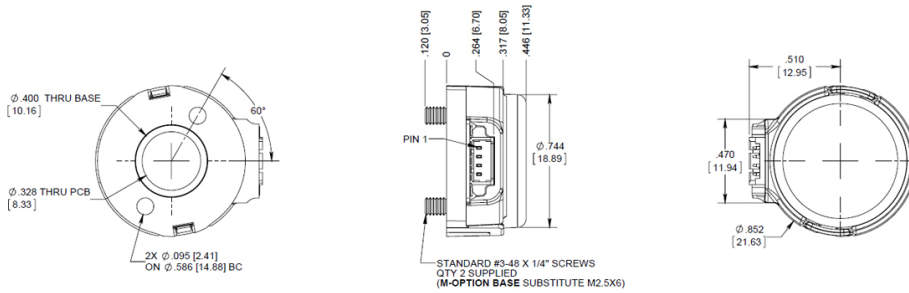


RELEASE DATE: 8/21/2011

H-OPTION COVER (COVER HOLE FOR EXTEND SHAFT LENGTHS)



H₁: 170° [4.32] FOR BORE SIZES 1.5MM TO 1/8"
H₂: 295° [7.49] FOR BORE SIZES 5/32" TO 1/4"

T-OPTION BASE (ADHESIVE MOUNTING)



Rev. 120326065423



E4P OEM Miniature Optical Kit Encoder

Page 3 of 3



Environmental

| Parameter | Value | Units |
|---|------------|-------|
| Vibration (5Hz to 2kHz) | 20 | G |
| Max. Relative Humidity | 90 | % |
| Storage Temperature | -40 to 100 | C |
| Operating Temperature | -20 to 100 | C |
| Electrostatic Discharge, Human Body Model | | |
| Single-ended (S-option) | ± 3 | kV |
| Differential (D-option) | ± 15 | |

Mechanical

| Parameter | Value | Units |
|---|--|----------------------|
| Max. Shaft Axial Play | ± .020 | in. |
| Max. Off-axis Mounting Tolerance | ± .010 | in. |
| Shaft to Mounting Surface Perpendicularity | 90 ± 1 | deg. |
| Max. Acceleration | 250000 | rad/sec ² |
| Maximum RPM (1) e.x. CPR = 360, max. rpm = 10000 e.x. CPR = 100, max. rpm = 36000 | minimum value of (3600000/CPR) and (60000) | rpm |
| Codewheel Moment of Inertia | 3.36 x 10 ⁻⁶ | oz-in-s ² |
| Mounting Screw Size | | |
| Default (D-option base) | #3-48 x 1/4" | |
| Metric (M-option base) | M2.5x.45mm, length 6mm | |
| Screw Bolt Circle Diameter | .586 ±.002 | in. |
| Axial Length of Codewheel | .270 | in. |
| Required Shaft Length (2) | .375 to .395 | in. |
| Mounting Screw Torque | 2-3 | in-lbs |

(1) 60000 rpm is the maximum rpm due to mechanical considerations. The maximum rpm due to the module's 60kHz maximum count frequency is (3600000/CPR).

(2) Includes axial play.

Single-ended Electrical

| Specifications | Min. | Typ. | Max. | Units | Notes |
|----------------|------|------|------|-------|-------|
|----------------|------|------|------|-------|-------|

Rev. 120326065423

E4P OEM Miniature Optical Kit Encoder

Page 4 of 5




| | | | | | |
|-------------------|-----|-----|-----|----|-------------------------|
| Supply Voltage | 4.5 | 5.0 | 5.5 | V | |
| Supply Current | | 21 | 27 | mA | no load |
| Low-level Output | | | 0.4 | V | IOL = 6 mA |
| High-level Output | 2.4 | | | V | IOH = -1 mA |
| Rise Time | | 500 | | ns | CL = 25 pF, RL = 2.7 kΩ |
| Fall Time | | 100 | | ns | |

Differential Electrical

| Specifications | Min. | Typ. | Max. | Units | Notes |
|------------------------------------|------|------|------|-------|--------------|
| Supply Voltage | 4.5 | 5.0 | 5.5 | V | |
| Supply Current | | 23 | 29 | mA | no load |
| Differential Output Voltage | 3.0 | 3.8 | | V | RL = 100 ohm |
| Differential Output Rise/Fall Time | | | 20 | ns | |

Phase Relationship

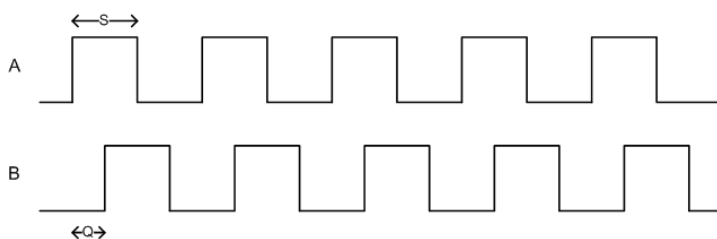

| Parameter | Typ. | Units |
|---------------------|----------|--------------------|
| Symmetry, S | 180 ± 16 | electrical degrees |
| Quadrature Delay, Q | 90 ± 12 | electrical degrees |

A leads B for clockwise shaft rotation, B leads A for counter clockwise shaft rotation viewed from the shaft/bushing side of the encoder.

Pin-out

| 4-pin Single-ended | | 6-pin Differential | |
|--------------------|-------------|--------------------|-------------|
| Pin | Description | Pin | Description |
| 1 | +5VDC power | 1 | Ground |
| 2 | A channel | 2 | A channel |

Rev. 120326065423

E4P OEM Miniature Optical Kit Encoder

Page 5 of 1



| 4-pin Single-ended | | 6-pin Differential | |
|--------------------|-----------|--------------------|-------------|
| 3 | Ground | 3 | A- channel |
| 4 | B channel | 4 | +5VDC power |
| | | 5 | B channel |
| | | 6 | B- channel |

Options

H-option (Hole In Cover)

The H-option adds a hole in the cover for the shaft to pass through:

- For shaft diameters of 1.5mm to 1/8", a 0.170" hole is supplied.
- For shaft diameters of 5/32" to 1/4", a 0.295" hole is supplied.

M-option (Metric Mounting Screws)

Provides alternate metric M2.5x.45mm, length 6mm screws. When M-option is NOT specified the default is #3-48 x 1/4" screws.

T-option (Transfer Adhesive)

When mounting holes are not available, a pre-applied transfer adhesive (with peel-off backing) is available for "stick-on" mounting. Use the centering tool (above) to position the base. T-option specifies transfer adhesive.

Before installation, cleaning the mounting surface with alcohol is recommended to remove dust and oil.

Assembly Instructions

Download the E4P Assembly Instructions.

<http://usdigital.com/assets/assembly/E4P Assembly Instructions.pdf>

Accessories

1. Centering Tool

The centering tool is only included with the -3 packaging option. It has to be ordered separately for other package options.

Part #: MCTOOL - (Shaft Diameter)

Description: This reusable tool provides a simple method for accurately centering the E4P base onto the shaft. A centering tool is highly recommended when using the T-option transfer adhesive.

2. Spacer Tool

A spacer tool is included for all packaging options.

Part #: SPACER-E4P

Description: This reusable tool is used to properly space the codewheel from the encoder.

Rev. 120326065423

E4P OEM Miniature Optical Kit Encoder

Page 6 of 1



Product Change Notifications

| Title | Date | Description | Download |
|---------------------------------|------------|--|--------------------------|
| E4 - E4P - S4 Update - PCN 1014 | 11/29/2011 | We have modified the E4, E4P and S4 product lines in order to improve the performance and durability of the encoder. Changes include new molds for the plastic base and cover parts with an over-molded bushing in the S4 base, a new SMT connector (compatible with current mating connector) and a modified PCB profile to accommodate the new connector and plastic part modifications. | Download |

Rev. 120326065423

E4P OEM Miniature Optical Kit Encoder

Page 7 of 11



Ordering Information

| E4P | CPR | Bore | Index | Output | Cover | Base | Packaging |
|-----|-----|-------|--------|--------------|-------------------|-----------------------|---|
| - | 100 | 059 = | N = No | S = Single | D = | D = Default | B = Encoder components packaged in bulk. One spacer tool per 100 encoders. |
| - | 108 | 1.5mm | Index | Ended | Default | M = Alternate metric | 1 = Each encoder packaged individually with one spacer tool per 100 encoders. |
| - | 120 | 079 = | | D = | H = Hole in Cover | M2.5x.45mm, length | 2 = Each encoder packaged individually with one spacer tool per encoder. |
| - | 125 | 2mm | | Differential | | 6mm screws | 3 = Each encoder packaged individually with one spacer tool and one centering tool per encoder. |
| - | 128 | 091 = | | | | T = Transfer Adhesive | |
| - | 200 | 2.3mm | | | | | |
| - | 250 | 098 = | | | | | |
| - | 256 | 2.5mm | | | | | |
| - | 300 | 118 = | | | | | |
| - | 360 | 3mm | | | | | |
| | | 125 = | | | | | |
| | | 1/8" | | | | | |
| | | 156 = | | | | | |
| | | 5/32" | | | | | |
| | | 157 = | | | | | |
| | | 4mm | | | | | |
| | | 188 = | | | | | |
| | | 3/16" | | | | | |
| | | 197 = | | | | | |
| | | 5mm | | | | | |
| | | 236 = | | | | | |
| | | 6mm | | | | | |
| | | 250 = | | | | | |
| | | 1/4" | | | | | |

Notes

- Cables and connectors are not included and must be ordered separately.
- US Digital warrants its products against defects in materials and workmanship for two years. See complete warranty for details.

Rev. 120326065423



We are here for you. Addresses and Contacts

Sales Switzerland

Matthias Rüegg
Ruhbergstrasse 32
CH-9230 Flawil

Phone +41 44 877 35 18
Mobile+41 76 491 66 66
Fax +41 44 877 35 19

matthias.rueegg@pewatron.com

Sales Germany

Baden-Württemberg Region
(Postcode 60000–79999)

Dieter Hirthe
Mühlweg 23
D-71554 Weissach i.T.

Phone +49 71 91 49 60 58
Mobile+49 163 76 27 430
Fax +49 71 91 93 31 88

dieter.hirthe@pewatron.com

Rest of Germany

Kurt Stritzelberger
Neumarkter Str. 86a
D-81673 Munich

Phone +49 89 260 38 47
Mobile+49 17 18 03 41 35
Fax +49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

Sales Austria

Kurt Stritzelberger
Neumarkter Str. 86a
D-81673 Munich

Phone +49 89 260 38 47
Mobile+49 17 18 03 41 35
Fax +49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

Sales Other Countries

PEWATRON AG
Thurgauerstrasse 66
CH-8052 Zurich

Phone +41 44 877 35 00
Fax +41 44 877 35 25

info@pewatron.com
www.pewatron.com

Sensors

Physical Sensors
Data Acquisition
Peter Felder
Phone +41 44 877 35 05
peter.felder@pewatron.com

Geometrical Sensors
Eric Letsch
Phone +41 44 877 35 14
eric.letsch@pewatron.com

Power Supplies

DC-DC Converters
Switching Power Supplies
DC-AC Inverters
Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@pewatron.com

E-Components

Current Converters
Man Machine Interface
Measurement Probes
Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@pewatron.com