


IMBA-C2160

ATX Motherboard Supports 22nm LGA1155 Intel® Xeon® E3/ Intel® Core™ i3 CPU with Intel® C216, DDR3, VGA, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS

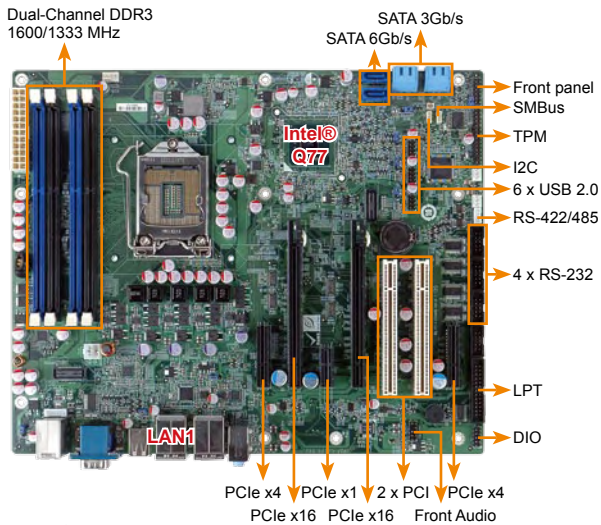

Specifications

- ◆ CPU
LGA1155 socket supports Xeon® E3 and Intel® Core™ i3 quad/dual core processor
- ◆ System Chipset
Intel® C216
- ◆ Memory
Four 240-pin 1600/1333MHz dual-channel DDR3 SDRAM ECC and non-ECC unbuffered DIMMs supported (system max. 32GB)
- ◆ BIOS
UEFI BIOS
- ◆ Ethernet
Intel® 82579 PHY with Intel® AMT 8.0 supported
Intel® 82574L PCIe controller
- ◆ Graphics Engine
Intel® HD Graphics 2000 / 3000
Supports DX10.1 and OpenGL 3.0
Full MPEG-2, VC1 and AVC Decode
- ◆ Display Output
VGA integrated in the Intel® C216 (up to 2048 x 1536 @75Hz)
- ◆ Super I/O
Fintek F81866
- ◆ Audio
Realtek ALC662 HD audio codec (Line-in, Line-out, Mic)
- ◆ I/O interface

5 x RS-232	1 x RS-422/485
4 x USB 3.0 (rear I/O)	10 x USB 2.0 (4 on rear, 6 by pin header)
4 x SATA 3Gb/s	2 x SATA 6Gb/s (RAID 0/1/5/10 support)
1 x LPT	1 x PS/2 KB/MS
1 x 6-pin wafer for PS/2 KB/MS	
- ◆ Front Panel

1 x Front_Panel (Power LED, HDD LED, Speaker, Power Button, Reset Button)

- ◆ Front Audio

2 x 5-pin header

- ◆ Front Panel

1 x Front panel connector (power LED, HDD LED, speaker, power button, reset button)

- ◆ TPM

2 x 10-pin header

- ◆ SMBus

1 x 4-pin wafer

- ◆ I2C

1 x 4-pin wafer


- ◆ Expansions

1 x PCIe x16 slot	1 x PCIe x16 slot (with x8 signal)
2 x PCIe x4 slot	1 x PCIe x1 slot
2 x PCI slot	
- ◆ Watchdog Timer
Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O
8-bit Digital I/O (8-bit GPIO is for programming I/O)
- ◆ Fan Connector


1 x 4-pin CPU fan connector
2 x 3-pin system fan connector
- ◆ Power Supply
ATX power supply
- ◆ Power Consumption
3.3V@1.55A, 5V@3.43A, Vcore@3.12A, 12V@0.20A, 5VSB@0.18A (Intel® Xeon® 2.2GHz CPU with two 1333MHz 4GB DDR3 memory)
- ◆ Operating Temperature
-10°C ~ 60°C
- ◆ Operating Humidity
5% ~ 95%, non-condensing
- ◆ Dimensions
244 mm x 305 mm
- ◆ Weight
GW:1200g/NW: 700g

Rich PCI Express expansion slots for automation & surveillance application field

Three PCIe 3.0, two PCIe 2.0 and two PCI slots fulfill multiple add-on card purpose such as high-end Ethernet card, RAID card or high performance graphics card.

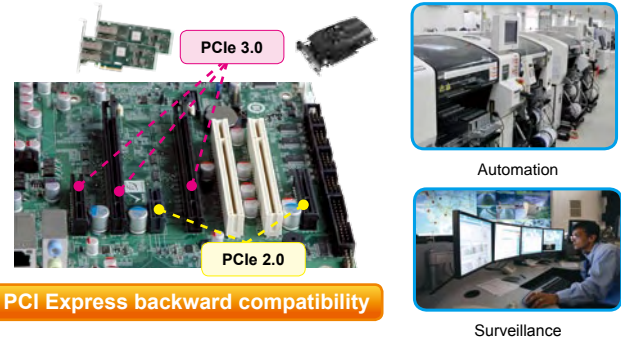

PCI Express backward compatibility

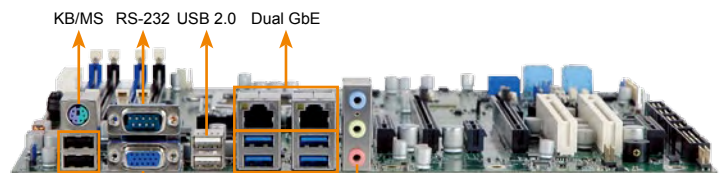

Features

1. LGA1155 Xeon® E3 and Intel® Core™ i7/i5/i3 processor supported
3. Dual-channel DDR3 1600/1333MHz supports up to 32GB
4. Intel® PCIe GbE with Intel® AMT 8.0 supported
5. Supports PCI-Express generation 3.0 at 8GT/s I/O bandwidth
6. USB 3.0 and SATA 6Gb/s supported
7. High speed interface usage for two PCIe x8/two PCIe x4 add-on cards
8. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Packing List

1 x IMBA-C2160 single board computer	
4 x SATA Cable (P/N: 32801-000703-200-RS)	1 x Mini jumper pack
1 x I/O shielding (P/N: 45014-0034C0-00-RS)	1 x Utility CD
1 x One Key Recovery CD	1 x QIG

Ordering Information

Part No.	Description
IMBA-C2160-R10	ATX motherboard supports 22nm LGA1155 Intel® Xeon® E3/ Intel® Core™ i3 CPU with Intel® C216, DDR3, VGA, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS
19800-003100-200-RS	Dual-port USB cable with bracket
32006-000300-100-RS	Male PS/2 KB/MS Y-cable w/o bracket, 12cm(KB)+14cm(MS)
32205-003800-100-RS	RS-422/485 cable, 200mm
19800-000051-RS	RS-232 cable, 230mm
32102-000100-200-RS	SATA power cable
19800-000075-RS	PS/2 KB/MS Y-cable with bracket, 6-pin header, 220mm
CF-1156A-RS	High performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W
CF-1156B-RS	High performance LGA1155/LGA1156 cooler kit, 95W
19800-000049-RS	LPT cable
TPM-IN01-R11	20-pin Infineon TPM module, SW management tool, firmware V3.17